Titan 'EDGE'

Flat Rooflight Data Sheet

Polished EDGE to EDGE Glass

Ultra Contemporary Unrivalled Aesthetics

Water Glides Off The Surface

No Vulnerable Or Messy Sealants On The Glass Surface

Pilkington Ac v Solar Control Glass As Standard

6mm Toughened External Pane Efficiently Reflects Heat

Low Maintenance Easy Clean Coating

Heatsoaked Inner Pane As Standard

Thermal Performance

Thermally Broken Aluminium Frame

20mm Warm edge Spacer Bar

Argon Gas Filled Sealed Unit

U Value of 1.3w/m2k

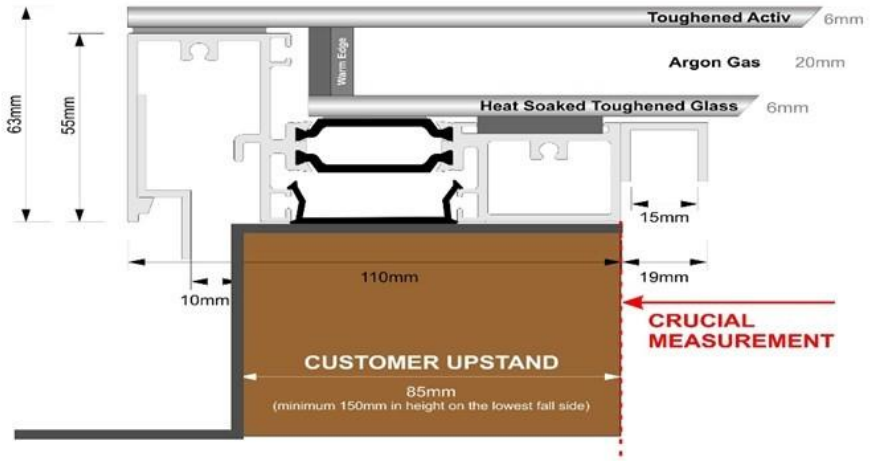

Simple Installation

Fixed From Inside-No Security Issues or Potential Leak Points

Fixing Straps Fixed In The Factory

This Is a 'One Piece Unit'. No Extra Bits To Fix On After.

Finishing

Plasterboard Pocket Fitted As Standard To Make Finishing Easy.

Technical

Glass Make-Up

Outer Pane-Polished Edge 6mm Toughened Easy Clean Solar Control With Blackened Border

20mm Warm edge Spacer Bar, Sealed With UV Stable Sealant. Argon Gas Filled

Inner Pane-6mm Softcoat heatsoaked toughened Glass

Recommended Pitch 5 Degrees

Suitable for installation on roof pitch of between 5 and 45 degrees

Glass Thickness Will Increase On Larger Units

TITAN
ALUMINIUM